


FRONT PANEL



REAR PANEL

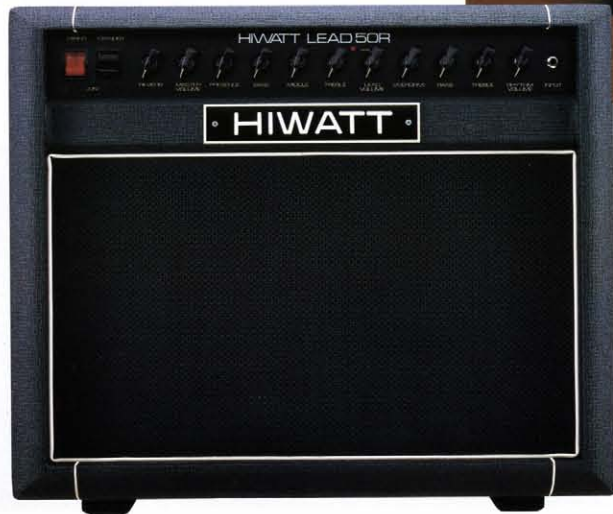

LC50R

¥178,000 (税別) (7月1日現在)  
60W R.M.S./120W PEAK

OUTPUT POWER R.M.S.	TOTAL PEAK* R.M.S.	PRE-AMP VALVES	OUTPUT VALVES	RECTIFICATION	MAINS FUSE	H.T. FUSE
60W	120W	6X500Z	6X42	SILICON DIODES	3A	1A

EFFECTS LOOP: VOLTAGE LEVEL 25mV FOR FULL OUTPUT.  
LINE LEVEL: 6db AT FULL OUTPUT INTO 600ohms.  
IV RMS INTO 10k ohms OR GREATER.  
CONTINUOUSLY VARIABLE.  
CHANNEL SWITCHING: LOW VOLTAGE RELAY CIRCUIT. FULLY REGULATED POWER SUPPLY FOR COIL HUM CANCELLATION.  
MAINS UNIT: 105/115/225/245V 40/60Hz 275W  
INPUT SENSITIVITY: LEAD CHANNEL 20mV, INPUT IMPEDANCE 1M ohm.  
REVERB: RHYTHM CHANNEL 25mV.  
TONE CONTROL RANGES: BASS: (MID, OFF) 25db.  
MID: 15db.  
TREBLE: (MID, OFF) 30db.  
PRES. 10db.  
VOLTAGE SELECTION IS INTERNALLY SET AT THE FACTORY FOR COUNTRY OF DESTINATION. (SWITCHABLE INTERNALLY).  
WEIGHT 28.5kg. DIMENSIONS 48.9" x 57.8" x 27.3cm  
\*INTO STANDARD LOAD IMPEDANCE  
i.e. 8/16 ohm.



BASS100

¥420,000  
LB100 ¥170,000 + LB412 ¥250,000  
115W R.M.S./230W PEAK

FRONT PANEL



REAR PANEL



OUTPUT POWER R.M.S.	TOTAL PEAK* R.M.S.	PRE-AMP VALVES	OUTPUT VALVES	RECTIFICATION	MAINS FUSE	H.T. FUSE
115W	230W	6X500Z	6X42	SILICON DIODES	3A	3A

EFFECTS LOOP: VOLTAGE LEVEL 25mV FOR FULL OUTPUT.  
LINE LEVEL: 6db AT FULL OUTPUT INTO 600ohms.  
IV RMS INTO 10k ohms OR GREATER.  
CONTINUOUSLY VARIABLE.  
CHANNEL SWITCHING: LOW VOLTAGE RELAY CIRCUIT. FULLY REGULATED POWER SUPPLY FOR COIL HUM CANCELLATION.  
MAINS UNIT: 105/115/225/245V 40/60Hz 275W  
INPUT SENSITIVITY: 2.2mV, RMS, MEASURED AT 500Hz.  
TONE CONTROL RANGES: BASS: 30db.  
MID: 15db.  
TREBLE: (INCLUDING PRESENCE) 36db.  
VOLTAGE SELECTION IS INTERNALLY SET AT THE FACTORY FOR COUNTRY OF DESTINATION. (SWITCHABLE INTERNALLY).  
WEIGHT 17.5kg. DIMENSIONS 63.5" x 27.3" x 26.7cm  
\*INTO STANDARD LOAD IMPEDANCE  
i.e. 8/16 ohm.

