

FRONT PANEL



REAR PANEL



HIWATT

HIWATT

## LC50R

¥178,000 (リバーブ搭載)

60W R.M.S./120W PEAK

OUTPUT POWER R.M.S.	TOTAL PEAK * R.M.S.	PRE-AMP VALVES	OUTPUT VALVES	RECTIFICATION	MAINS FUSE	H.T. FUSE
60W (ELECTRO)	120W	6X25X5	EL34X2	SILICON DIODES	3A	1A

EFFECTS LOOP - VOLTAGE LEVEL 25mV FOR FULL OUTPUT.  
LINE LEVEL : 6db AT FULL OUTPUT INTO 600ohms.  
4V RMS INTO 10K ohms OR GREATER.  
CONTINUOUSLY VARIABLE.  
CHANNEL SWITCHING - LOW VOLTAGE RELAY CIRCUIT FULLY  
REGULATED POWER SUPPLY FOR COIL HUM CANCELLATION.  
MAINS UNIT : 105/115/225/245V, 40/60Hz, 175W  
INPUT SENSITIVITY - LEAD CHANNEL 0.5mV, INPUT IMPEDANCE 1M ohm.  
RHYTHM CHANNEL 25mV.  
REVERB - DOUBLE SPRING ACCUTRONICS  
TONE CONTROL RANGES - BASS/MID: OFF/30db,  
MID 15db,  
TREBLE/MID: OFF/30db,  
PRESENCE 10db.  
VOLTAGE SELECTION IS INTERNALLY SET AT THE FACTORY FOR COUNTRY OF  
DESTINATION. (SWITCHABLE INTERNALLY).  
WEIGHT 28.5kg, DIMENSIONS 48.9x57.8x27.3cm

\* INTO STANDARD LOAD IMPEDANCE  
i.e. 8/16 ohm.

## BASS100

¥420,000

LB100¥170,000+LB412¥250,000  
115W R.M.S./230W PEAK

FRONT PANEL




REAR PANEL



OUTPUT POWER R.M.S.	TOTAL PEAK * R.M.S.	PRE-AMP VALVES	OUTPUT VALVES	RECTIFICATION	MAINS FUSE	H.T. FUSE
115W	230W	6X25X4	EL34X4	SILICON DIODES	3A	3A

EFFECTS LOOP - VOLTAGE LEVEL 25mV FOR FULL OUTPUT.  
LINE LEVEL : 6db AT FULL OUTPUT INTO 600ohms.  
4V RMS INTO 10K ohms OR GREATER.  
CONTINUOUSLY VARIABLE.  
CHANNEL SWITCHING - LOW VOLTAGE RELAY CIRCUIT FULLY  
REGULATED POWER SUPPLY FOR COIL HUM CANCELLATION.  
MAINS UNIT : 105/115/225/245V, 40/60Hz, 175W  
INPUT SENSITIVITY : 2.5mV, RMS, MEASURED AT 500Hz.  
TONE CONTROL RANGES - BASS 30db,  
MID 10db,  
TREBLE (INCLUDING PRESENCE) 30db.  
VOLTAGE SELECTION IS INTERNALLY SET AT THE FACTORY FOR COUNTRY OF  
DESTINATION. (SWITCHABLE INTERNALLY).  
WEIGHT 17.5kg, DIMENSIONS 63.5x27.3x26.7cm

\* INTO STANDARD LOAD IMPEDANCE  
i.e. 8/16 ohm.

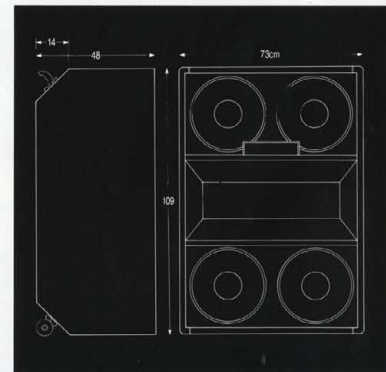

LB100

HIWATT

LB412