



LC50R TRINITY

¥170,000 (リバーブ搭載)
60W R.M.S./120W PEAK
(リバーブ搭載)

FOOT PEDAL

MONORAL (with cord) ¥6,000
STEREO (with cord) ¥7,000



ORIGINAL TUBE

EL-34PAIR ¥8,000
ECC-83PCS ¥2,000



FRONT PANEL TRINITY



FRONT PANEL MOBBIE DICK



REAR PANEL

L100R ¥198,000 / L100 ¥185,000
(リバーブ搭載) (リバーブ無し)

L50R ¥162,000 / L50 ¥148,000
(リバーブ搭載) (リバーブ無し)

OUTPUT POWER (RMS) : 100W (L-100/L-100R), 60W (L-50/L-50R)
CONTROL : RHYTHM CH. — VOLUME, TREBLE, BASS
OVERRIDE CH. — OVERRIDE (1/2), VOLUME, TREBLE, MIDDLE, BASS
MASTER VOLUME, PRESENCE, REVERB (L-100R/L-100R)
EFFECTS LOOP : VOLTAGE LEVEL 25mV FOR FULL OUTPUT
LINE LEVEL : 600 Ω AT FULL OUTPUT INTO 600Ωrms
IV RMS INTO 10K ohms OR GREATER,
CONTINUOUSLY VARIABLE.

CHANNEL SWITCHING : LOW VOLTAGE RELAY CIRCUIT FULLY
REGULATED POWER SUPPLY FOR COIL HUM CANCELLATION
INPUT SENSITIVITY : LEAD CHANNEL 2mV, INPUT IMPEDANCE : 1M ohm.
RHYTHM CHANNEL 25mV
REVERB : DOUBLE SPRING ACCUTONICS (L-100R/L-50R)
TONE CONTROL RANGES : BASS (MID. OFF) 25db,
MID 15 db,
TREBLE (MID. OFF) 30db,
PRESENCE 10db.

DIMENSIONS 63.5 × 27.3 × 20.7cm
*INTO STANDARD LOAD IMPEDANCE
i.e. 8/16 ohm.

LC50R ¥170,000
(リバーブ搭載)

OUTPUT POWER (RMS) : 60W
CONTROL : RHYTHM CH. — VOLUME, TREBLE, BASS
OVERRIDE CH. — OVERRIDE (1/2), VOLUME, TREBLE, MIDDLE, BASS
MASTER VOLUME, PRESENCE, REVERB
EFFECTS LOOP : VOLTAGE LEVEL 25mV FOR FULL OUTPUT.
LINE LEVEL : 600 Ω AT FULL OUTPUT INTO 600Ωrms.
IV RMS INTO 10K ohms OR GREATER,
CONTINUOUSLY VARIABLE.

CHANNEL SWITCHING : LOW VOLTAGE RELAY CIRCUIT FULLY
REGULATED POWER SUPPLY FOR COIL HUM CANCELLATION
INPUT SENSITIVITY : LEAD CHANNEL 2mV, INPUT IMPEDANCE : 1M ohm.
RHYTHM CHANNEL 25mV
REVERB : DOUBLE SPRING ACCUTONICS
TONE CONTROL RANGES : BASS (MID. OFF) 25db,
MID 15db,
TREBLE (MID. OFF) 30db,
PRESENCE 10db.

DIMENSIONS 48.9 × 57.8 × 27.3cm
*INTO STANDARD LOAD IMPEDANCE
i.e. 8/16 ohm.

LB100 ¥160,000
(リバーブ搭載)


OUTPUT POWER (RMS) : 100W
CONTROL : CH 1 — VOLUME, BASS, TREBLE, MIDDLE
CH 2 — VOLUME, BASS, TREBLE, MIDDLE
MASTER VOLUME, PRESENCE
EFFECTS LOOP : VOLTAGE LEVEL 25mV FOR FULL OUTPUT.
LINE LEVEL : 600 Ω AT FULL OUTPUT INTO 600Ωrms.
IV RMS INTO 10K ohms OR GREATER,
CONTINUOUSLY VARIABLE.

CHANNEL SWITCHING : LOW VOLTAGE RELAY CIRCUIT FULLY
REGULATED POWER SUPPLY FOR COIL HUM CANCELLATION
INPUT SENSITIVITY : 2.5mV RMS, MEASURED AT 500Hz.
TONE CONTROL RANGES : BASS 30db,
MID 10db,
TREBLE (INCLUDING PRESENCE) 30db.

DIMENSIONS 63.5 × 27.3 × 26.7cm
*INTO STANDARD LOAD IMPEDANCE
i.e. 8/16 ohm.

LA412 ¥150,000

LS412 ¥150,000

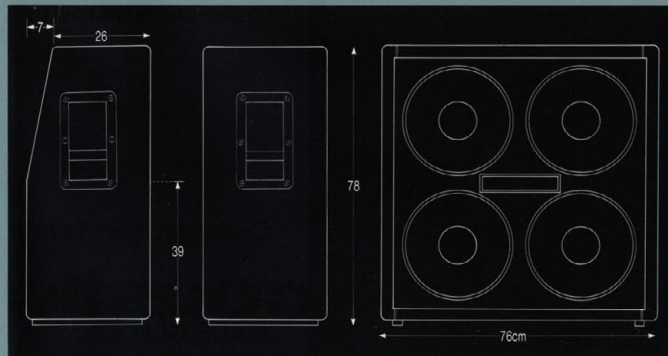

LB412 ¥230,000

